


Pneumatic Spherical Vibrator

Characteristics

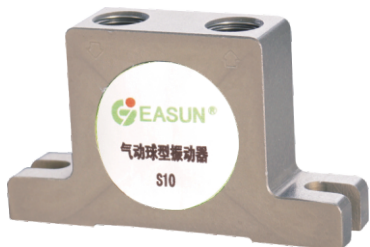


- ◆The dustproof and waterproof design is applicable in wet, dusty and explosive surroundings.
- ◆Backup ring and steel ball, use high strength high tightness material, so they have long lifetime.
- ◆Fast vibration frequency, large vibratory force and amplitude, low air consumption. and the gas supply pressure can be adjusted freely.
- ◆Our products equipped with standard threaded pipe, so it's easy to install.
- ◆Muffler can be assembled to have low noise.

Product Code System

S	—	10
S系列/S Series		规格/Specifications
		8, 10, 13, 16, 20, 25, 30, 36

Specification

型号Model		
工作温度/Working temperature	℃	0 ~ 200℃
压缩空气工作压力 Working pressure of compressed air	MPa	≤0.6MPa

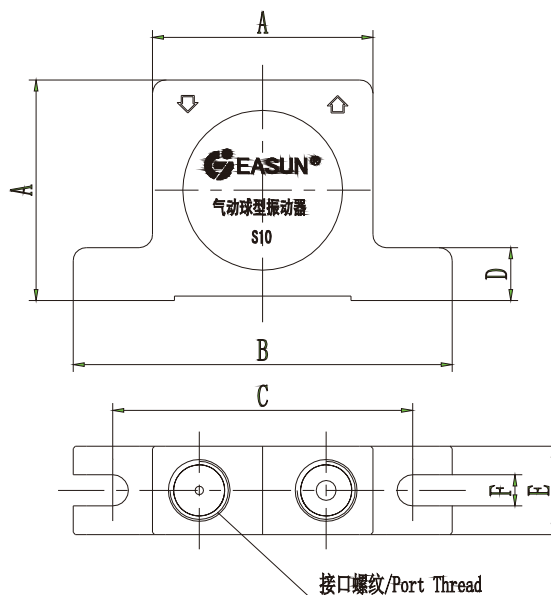

型号 /Type	振次/Vibration			激振力/F.C.max			耗气量/Air Consump			A	B	C	D	E	F	接口螺纹/ Port Thread
	VPM			kg			L/min									
	2bar	4bar	6bar	2bar	4bar	6bar	2bar	4bar	6bar							
S8	25500	31000	35000	13	26	36	83	145	195	50	86	68	12	20	7	G1/4
S10	22500	28000	34000	25	47	71	92	150	200					25		
S13	15000	18500	22500	32	55	87	94	158	225	65	113	90	16	28	9	
S16	13000	17000	19500	45	80	110	122	200	280							
S20	10500	14500	16500	72	122	172	130	230	340	80	128	104	16	33	9	
S25	9200	12200	14000	93	157	205	160	290	425					38		
S30	7800	9700	12500	151	247	321	215	375	570	100	160	130	20	45	11	G3/8
S36	7300	9000	10000	206	315	405	260	475	675					50		