


3J2系列二位三通控制阀



3J210RB




3J210R



3J210PP



3J210PB




3J210EB



3J210TB

型号命名

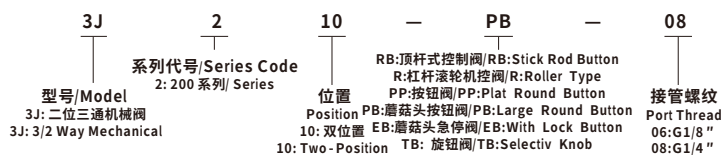

举例


▲欲订购接管螺纹为1/4" 旋钮式二位三通的3J2系列控制阀，其正确的订购码为：3J210 - TB - 08

技术参数


型号 / Model	3J210R-06	3J210R-06	3J210PP-06	3J210PB-06	3J210EB-06	3J210TB-06	3J210R-08	3J210PP-08	3J210PB-08	3J210EB-08	3J210TB-08
工作介质/ Fluids	经过滤的压缩空气 / the constrigent after filtered										
位置数/ Position	二位三通/ 3/2 Way										
有效截面积/ Efficient Sectional Area	14mm ² (CV=0.78)						16mm ² (CV=0.78)				
接管螺纹/Port Thread	进气/ Supply=出气/ Export=排气/ Exhaust=G1/8 "						进气/ Supply=出气/ Export=G1/4 " 排气/ Exhaust=G1/8 "				
润滑 / Lubrication	不需要/Not Required										
使用压力/ Operating Pressure	0~0.8MPa										
最大耐压力 / Max Pressure	1.0MPa	1.2MPa									
工作温度 / Operating Temperature	-40~120℃	-5~60℃									

外形与安装尺寸

3J210RB

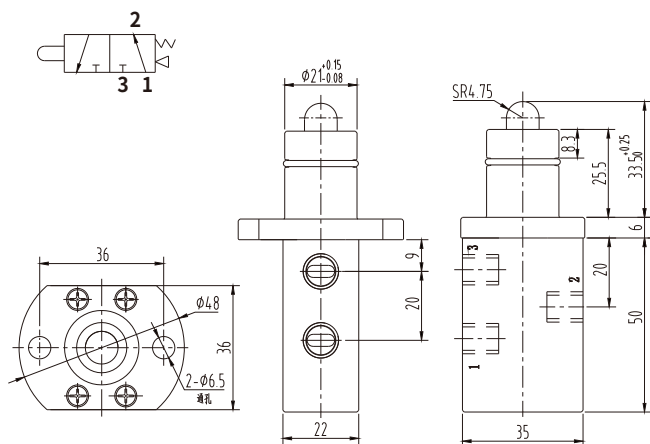


3J210R-08(06)

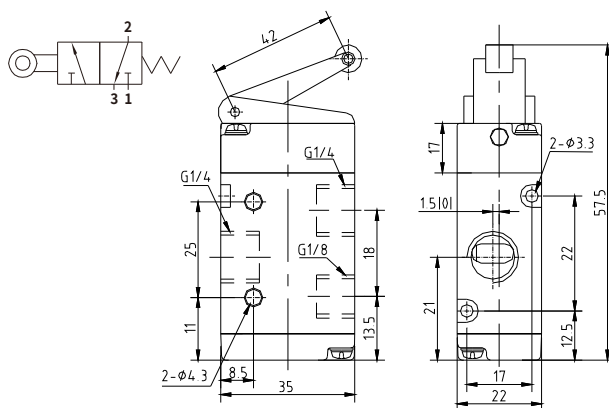


■ 外形与安装尺寸


3J210PP-08(06)

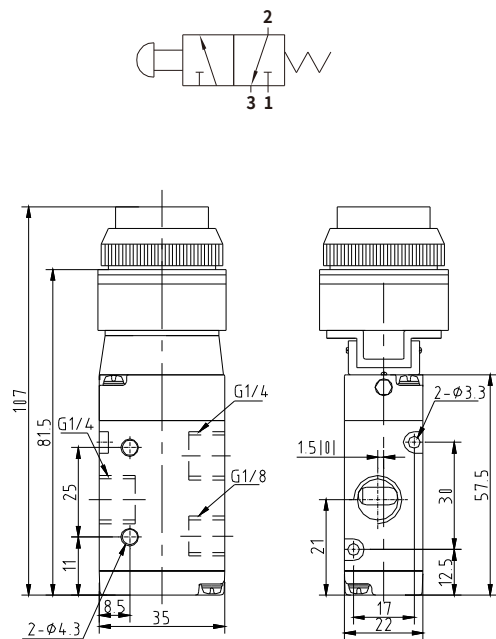

3J210PB-08(06)

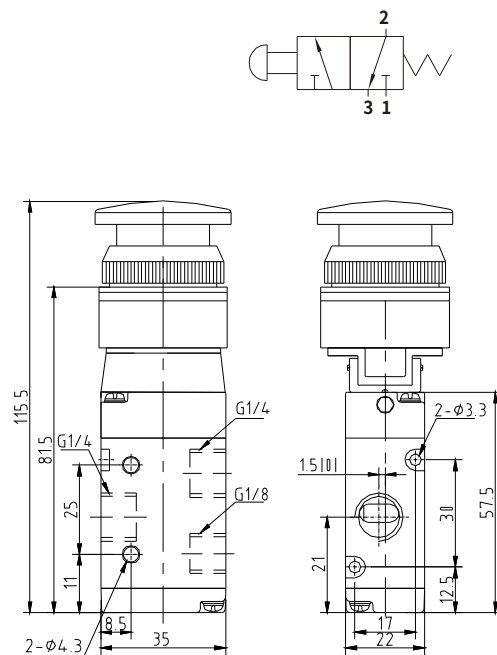

3J210EB-08(06)

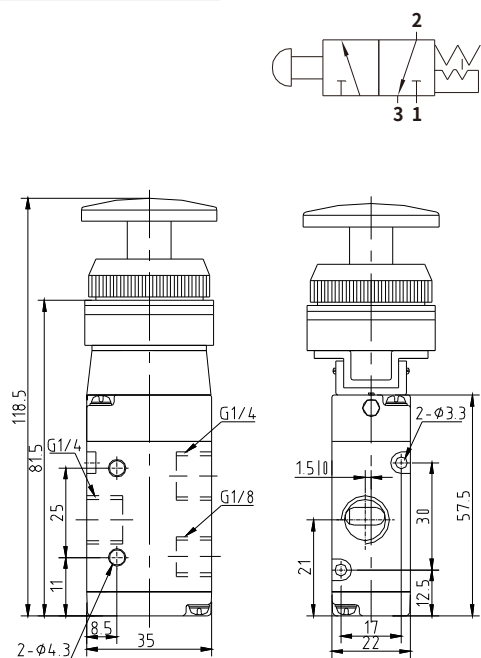

3J210TB-08(06)

