



真空发生器EZH系列



直接接管型/D型
Direct connection type/ D type





盒型/B型
Box type/ B type

型号/Model	规格/specification								
	喷嘴口径 Nozzle Orifice Diameter (φmm)	本体型式 Body	最高真空压力 Max Vacuum Pressure Torr (KPa)	接管方式 Joint thread	接管口径/Connector Diameter			最大吸入流量 Max suction flow	空气消耗量 Air consumption
					供气/Air feed	真空/Vacuum	排气/Exhaust		
EZH05BS-06-06	0.5	盒型 [内置消音器] Box type With silencer	-88	快速接头 (适用气管 外径) Tube OD	φ6	φ6	-	5	13
EZH07BS-06-06	0.7				φ6	φ6	-	12	23
EZH10BS-06-06	1.0				φ6	φ6	-	24	46
EZH13BS-08-10	1.3				φ8	φ10	-	40	78
EZH05BS-01-01	0.5			内螺纹式 Rc (PT)	1/8	1/8	-	5	13
EZH07BS-01-01	0.7				1/8	1/8	-	12	23
EZH10BS-01-01	1.0				1/8	1/8	-	24	46
EZH13BS-01-02	1.3				1/8	1/4	-	40	78
EZH05DS-06-06-06	0.5	直接接管 [型无消音器] Direct connection type Without silencer		快速接头 (适用气管 外径) Tube OD	φ6	φ6	φ6	5	13
EZH07DS-06-06-06	0.7				φ6	φ6	φ6	12	23
EZH10DS-06-06-08	1.0				φ6	φ6	φ8	24	46
EZH13DS-08-10-10	1.3				φ8	φ10	φ10	40	78
EZH05DS-01-01-01	0.5			内螺纹式 Rc (PT)	1/8	1/8	1/8	5	13
EZH07DS-01-01-01	0.7				1/8	1/8	1/8	12	23
EZH10DS-01-01-01	1.0				1/8	1/8	1/8	24	46
EZH13DS-01-02-02	1.3				1/8	1/4	1/4	40	78

技术参数


使用流体/ Fluid	空气/Air
使用压力范围/ Range of Working Pressure	2.5 ~ 6kgf/cm ² (250 ~ 600KPa)
最高使用压力/Max pressure	7kgf/cm ² (700KPa)
使用温度范围 / Operating Temp	5 ~ 60
给油/oil feed	不可以/Not allowed

构造图

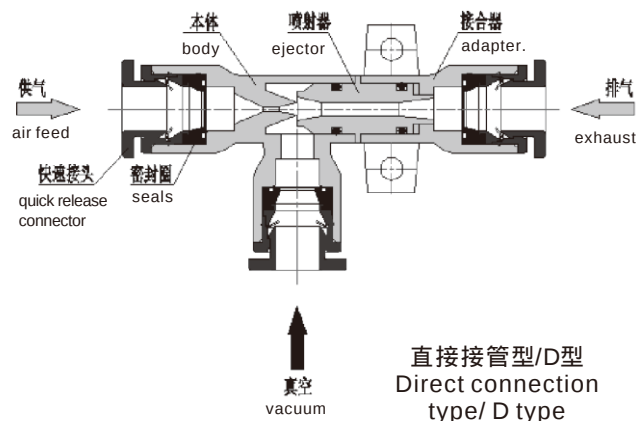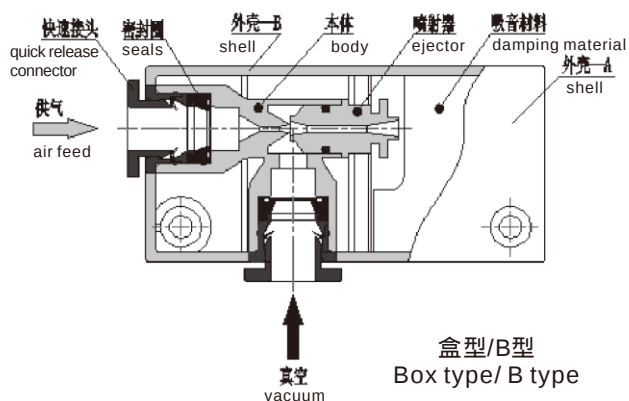


外形与安装尺寸

盒型（内置消声器） 快换接头连接
box type with silencer quick release connector

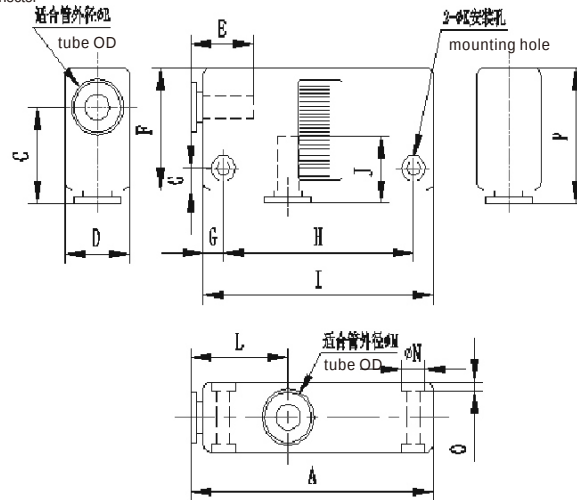


型号/Model	A	ϕB	C	D	E	F	G	H	I	J	ϕK	L	ϕM	ϕN	O	P
EZH05B _L ^S -01-01	57.6	6	21.6	16	16	12.8	5	47	57	16	3.2	23.6	6	5.8	2	30.6
EZH07B _L ^S -01-01	57.6	6	21.6	16	16	12.8	5	47	57	16	3.2	23.6	6	5.8	2	30.6
EZH10B _L ^S -01-01	59.6	6	22.6	18	16	12.8	5	50	60	16	3.2	25.6	6	5.8	2	31.6
EZH13B _L ^S -01-02	74.6	8	27.1	23	18.3	13.7	7	61	75	21	4.2	27.6	10	7.5	3	38.1

螺纹连接
thread connection

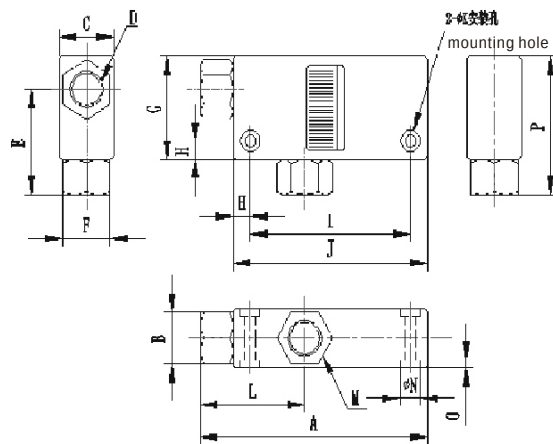


型号/Model	A	B	C	D	E	F	G	H	I	J	ϕK	L	M	ϕN	O	P
EZH05B _L ^S -01-01	66.7	14	16	Rc1/8	28.7	14	28	5	47	57	3.2	30.7	Rc1/8	5.8	2	37.7
EZH07B _L ^S -01-01	66.7	14	16	Rc1/8	28.7	14	28	5	47	57	3.2	30.7	Rc1/8	5.8	2	37.7
EZH10B _L ^S -01-01	69.7	14	18	Rc1/8	29.7	14	29	5	50	60	3.2	32.7	Rc1/8	5.8	2	38.7
EZH13B _L ^S -01-02	85.7	14	23	Rc1/8	36.7	17	35	7	61	75	4.2	35.7	Rc1/4	7.5	3	47.7

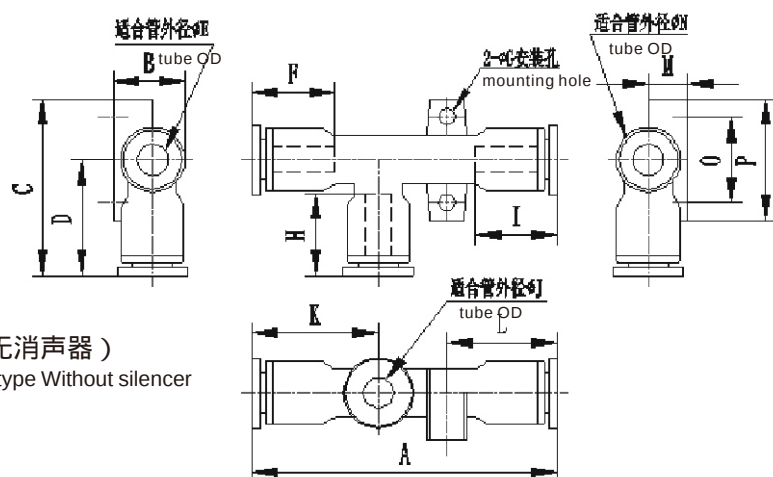

直接接管型（无消声器）
Direct connection type Without silencer
快换接头连接
quick release connector

型号/Model	A	B	C	D	ΦE	F	ΦG	H
EZH05D ₁ -06-06-06	60.5	14.2	35	23	6	16	3.2	16
EZH07D ₁ -06-06-06	63	14.2	35	23	6	16	3.2	16
EZH10D ₁ -06-06-08	68.5/72.5	17.2	38	24	6	16	4.2	16
EZH13D ₁ -08-10-10	76.9/82.4	20	43.9	28.9	8	18.3	4.2	21

型号/Model	I	ΦJ	K	L	M	ΦN	O	P
EZH05D ₁ -06-06-06	16	6	25	22	7.8	6	17	24
EZH07D ₁ -06-06-06	16	6	25	23	7.8	6	17	24
EZH10D ₁ -06-06-08	18.3	6	27	26	9.6	8	20	28
EZH13D ₁ -08-10-10	21	10	29.5	28.4	10.7	10	22	30

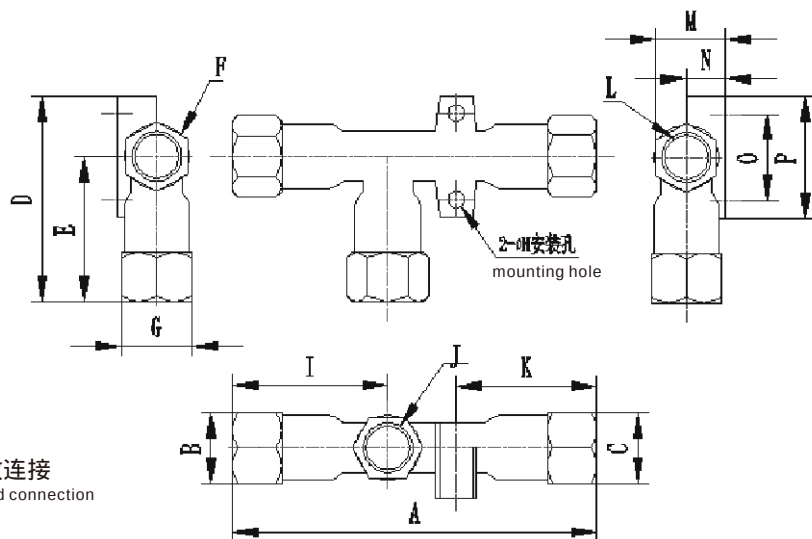

螺纹连接
thread connection

型号/Model	A	B	C	D	E	F	G	ΦH
EZH05D ₁ -01-01-01	71.9	14	14	40.7	28.7	Rc1/8	14	3.2
EZH07D ₁ -01-01-01	74.4	14	14	40.7	28.7	Rc1/8	14	3.2
EZH10D ₁ -01-01-01	80.4/84.4	14	14	43.7	29.7	Rc1/8	14	4.2
EZH13D ₁ -01-02-02	91.4/96.4	14	17	53.7	38.7	Rc1/8	17	4.2

型号/Model	I	J	K	L	M	N	O	P
EZH05D ₁ -01-01-01	30.7	Rc1/8	27.7	Rc1/8	14.8	7.8	17	24
EZH07D ₁ -01-01-01	30.7	Rc1/8	28.7	Rc1/8	14.8	7.8	17	24
EZH10D ₁ -01-01-01	32.7	Rc1/8	32.7	Rc1/8	17.8	9.6	20	28
EZH13D ₁ -01-02-02	35.7	Rc1/4	40.2	Rc1/4	19.2	10.7	22	30